


PHR-12500 12 Volt 150 AH @ 20-hr. rate 492 W/Cell @ 15-min. rate

Rechargeable Sealed Lead Acid Battery
PHR HIGH RATE SERIES

We've Got The Power.™



Physical Dimensions: in (mm)

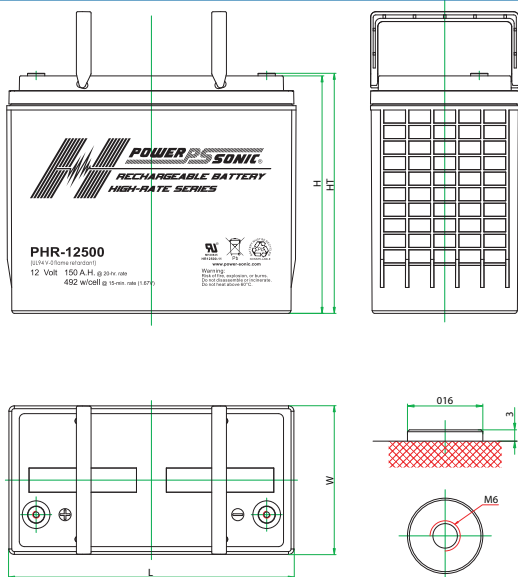

L: 13.19 (335) W: 6.77 (172) H: 10.83 (275) HT: 10.94 (278)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions.

Features

- Superb high-rate discharge characteristics that ensure reliable performance in UPS applications for up to 10 years. UL recognized
- Flame retardant ABS case and cover to UL 94 V-O for superior performance
- VRLA Absorbent Glass Mat (AGM) Technology guarantees safe operation without maintenance and "non-restricted article" status for transportation. Approved for transport by air. D.O.T., I.A.T.A. and F.A.A. certified.
- Precision plate pasting for higher consistency with 100% load testing to ensure uniform capacity
- Patented dual-paste process for enhanced active material bonding, and computer guided volumetric electrolyte control for precision filling
- Lead-calcium alloy grids and the use of high purity lead account for superior shelf-life characteristics

Performance Specifications

Nominal Voltage 12 volts (6 cells)

Nominal Power (15 min.) 492 W/Cell

Rated Capacity

20-hr. (7.50A to 10.80 volts) 150.0 AH

10-hr. (14.30A to 10.50 volts) 143.0 AH

8-hr. (17.50A to 10.50 volts) 140.0 AH

Approximate Weight 92.6 lbs. (42.0 kg)

Internal Resistance (approx.) 3.2 milliohms

Max Discharge Current (5 Sec.) 1846 amperes

Charging Voltage @ 77°F (20° C)

Standby Use 2.275 ± 0.025 V/Cell, (-3.3mV/°C/Cell)

Cycle Use 2.45±0.05 V/Cell, (-5 mV /°C/Cell)

Maximum Charging Current 42.6 A

Case Flame Retardant ABS Plastic (UL 94 V-O)

Constant Current Discharge (Amperes) at 25°C

Constant Power Discharge (Watts/Cell) at 25°C (Blue)

PHR-12500	5 min	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V	286	219	182	157	121	89.5	75.4	44.6	34.9	28.4	23.1	20.1	16.2	13.5	7.4
1.80V	383	280	220	186	143	104	84.5	48.7	37.6	30.3	24.8	21.5	17.2	14	7.5
1.75V	432	308	240	200	149	108	88.4	50.5	38.3	31	25.5	22.1	17.5	14.3	7.6
1.70V	476	336	256	210	155	112	91.2	51.8	39.3	31.8	26.1	22.6	17.7	14.6	7.7
1.67V	525	362	272	223	163	115	93.3	52.5	41	32.9	26.9	23.1	18	14.9	7.8
1.60V	579	393	291	238	173	120	94.2	54.8	42.2	33.9	27.8	23.6	18.2	15.1	7.9
1.85V	497.8	416.3	366.4	329.0	261.1	199.4	162.9	96.6	70.3	56.2	47.3	41.1	32.7	27.3	14.3
1.80V	583.6	464.8	403.5	355.1	278.1	210.8	171.7	100.2	72.9	57.7	48.3	41.8	33.3	27.7	14.6
1.75V	661.2	521.8	438.3	377.7	290.8	219.8	179.2	103.3	75.0	59.3	49.5	42.9	33.9	28.0	14.8
1.70V	722.4	555.3	462.8	397.6	303.2	228.4	185.4	106.7	76.5	60.3	50.4	43.4	34.3	28.3	15.0
1.67V	777.5	591.1	492.0	416.4	317.3	237.7	191.8	109.9	78.2	61.7	51.1	44.1	34.6	28.6	15.2
1.60V	829.6	628.8	511.8	429.8	325.9	242.2	195.1	110.8	78.8	61.9	51.5	44.3	34.6	28.6	15.2