

### Specifications

Nominal Voltage	12V	
Nominal Capacity (10HR)	12AH	
Dimension	Length	149mm (5.87 inches)
	Width	87mm (3.43 inches)
	Height	145mm (5.71 inches)
	Total Height (with Terminal)	145mm (5.71 inches)
	Approximate Weight	4.28 kg (9.43 lbs)
CCA	200	
Polarity	-/+	
Battery Type	Valve Regulated Lead-Acid Battery, AGM Design	
Terminal Type	NB	
Acid Volume	0.73 Liter	
Charge Current	1.20 Amps	
Operating Temp. Range	Discharge:	-20°C (-4°F)~50°C (122°F)
	Charge:	-20°C (-4°F)~50°C (122°F)
	Storage:	-20°C (-4°F)~40°C (104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Self Discharge	SigmasTek ST series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is recommended. For higher temperatures the time interval will be shorter.	



### Applications




- ATV
- Jet Ski
- Motorcycle
- Snowmobile
- Lawn & Garden




### Dimensions

#### NB Terminal


Unit: mm (inches)

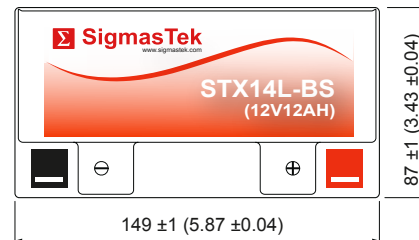

### Self Discharge Characteristics

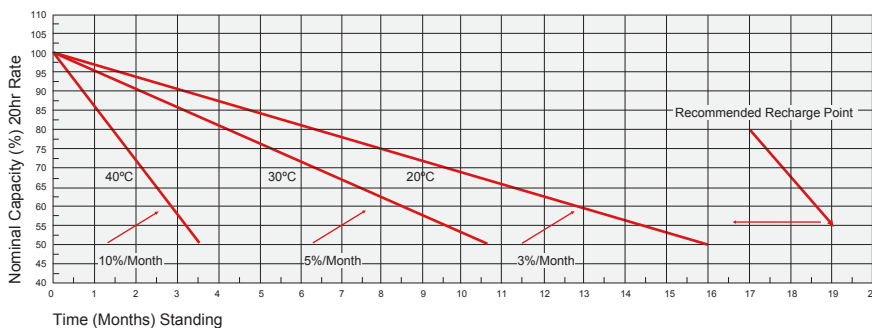

### Discharge Characteristics

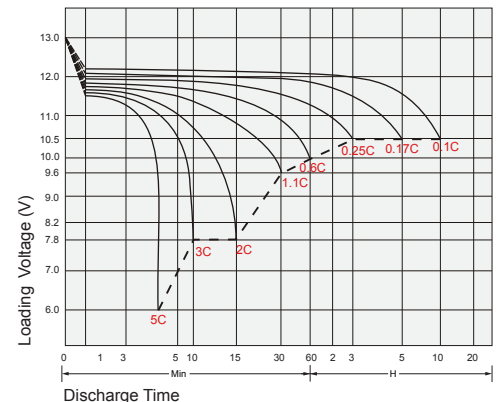

### Contact Information

SigmasTek  
7651 W 100th Place  
Bridgeview, IL 60455, USA

T: (888) 988-8290  
www.sigmastek.com  
order@sigmastek.com