

Specifications

| | | |
|-------------------------------|---|---------------------------|
| Nominal Voltage | 12V | |
| Nominal Capacity (10HR) | 18AH | |
| Dimension | Length | 175mm (6.89 inches) |
| | Width | 87mm (3.43 inches) |
| | Height | 156mm (6.14 inches) |
| | Total Height (with Terminal) | 156mm (6.14 inches) |
| | Approximate Weight | 6.10 kg (13.44 lbs) |
| CCA | 310 | |
| Polarity | -/+ | |
| Battery Type | Valve Regulated Lead-Acid Battery, AGM Design | |
| Terminal Type | NB | |
| Acid Volume | 0.96 Liter | |
| Charge Current | 2.00 Amps | |
| Operating Temp. Range | Discharge: | -20°C (-4°F)~50°C (122°F) |
| | Charge: | -20°C (-4°F)~50°C (122°F) |
| | Storage: | -20°C (-4°F)~40°C (104°F) |
| Nominal Operating Temp. Range | 25±3°C (77±5°F) | |
| Self Discharge | SigmasTek ST series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is recommended. For higher temperatures the time interval will be shorter. | |



Applications




- ATV
- Jet Ski
- Motorcycle
- Snowmobile
- Lawn & Garden




Dimensions

NB Terminal


Unit: mm (inches)

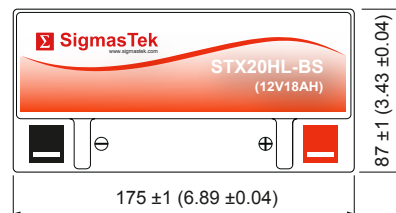

Self Discharge Characteristics

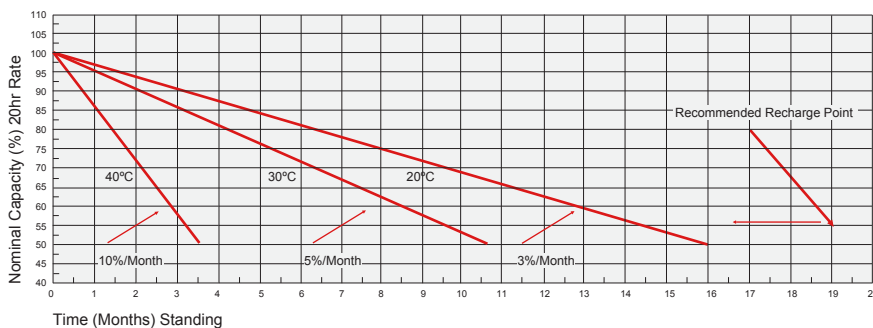

Discharge Characteristics

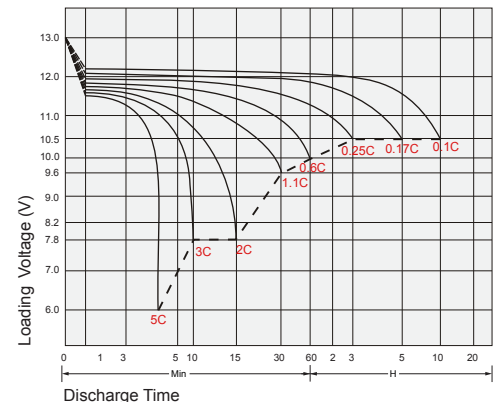

Contact Information

SigmasTek
7651 W 100th Place
Bridgview, IL 60455, USA

T: (888) 988-8290
www.sigmastek.com
order@sigmastek.com